


Bridge Plug Inflatable Packers

INFLATABLE BRIDGE PLUGS

STANDARD BRIDGE PLUG \varnothing 10"

IBP254SE1500

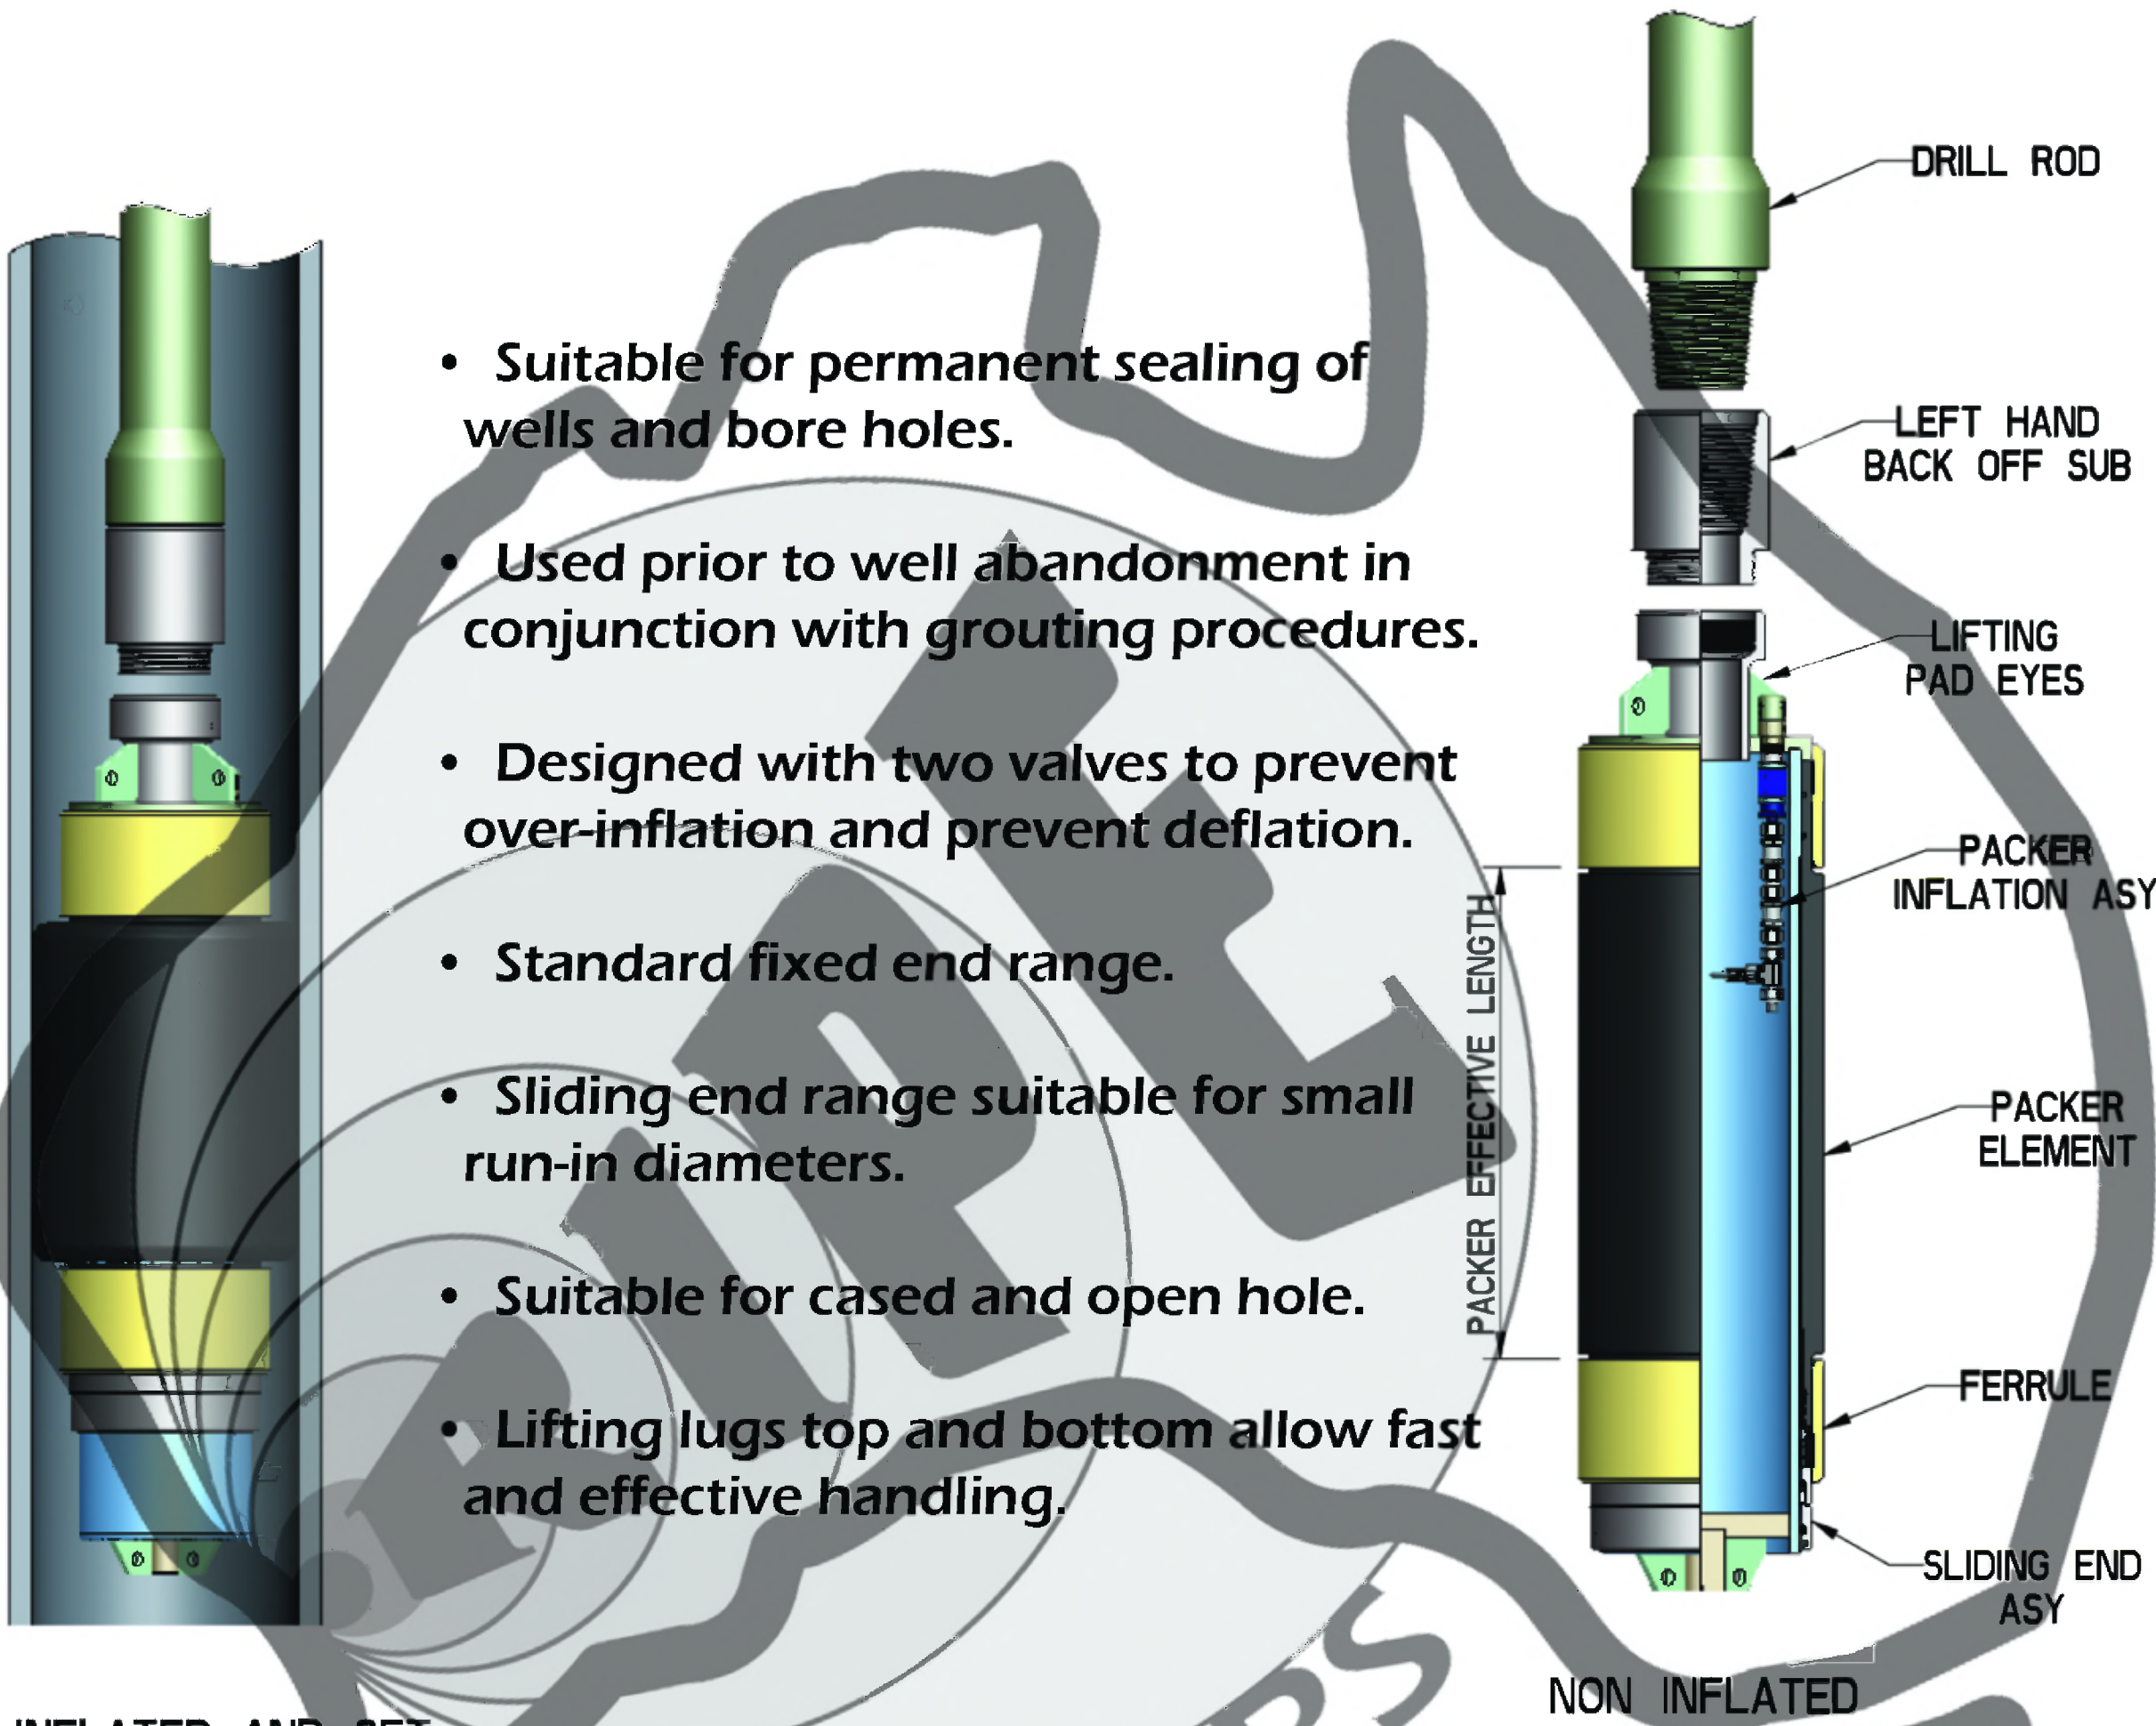

- Suitable for permanent sealing of wells and bore holes.
- Used prior to well abandonment in conjunction with grouting procedures.
- Designed with two valves to prevent over-inflation and prevent deflation.
- Standard fixed end range.
- Sliding end range suitable for small run-in diameters.
- Suitable for cased and open hole.
- Lifting lugs top and bottom allow fast and effective handling.

INFLATED AND SET

NON INFLATED

- Large range of Bridge Plugs to suit standard casing sizes
- Non-standard sizes upon request.

STANDARD MAXIMUM CASING SIZE ID	OD OF PACKER	EFFECTIVE LENGTH	INFLATION VOLUME LITRES	PERCENTAGE INFLATION DIA	DIFFERENTIAL PRESSURE CAPACITY
					SUPPORTED kg
254mm	168mm	1500mm	96	51.2%	7000

TABLE PACKER PERFORMANCE GUIDE ONLY

ALL SIZES AND PRESSURES AVAILABLE ON REQUEST

Replacement Inflatable Packers and Elements Pty Ltd
29 Wheeler St Belmont 6104, Perth Western Australia